
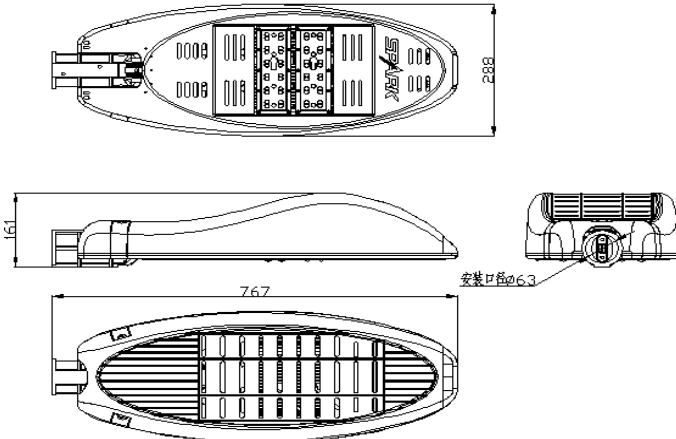
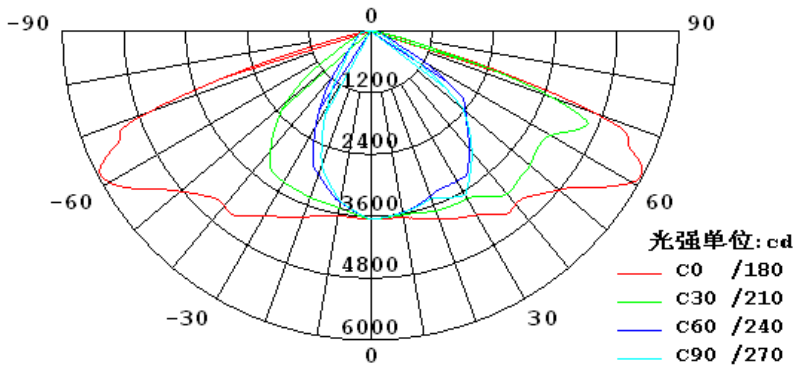


Modular Street Light SPL-D60 Specification

Picture	
Model No.	SPL-D60
LED Light Source	CREE
LED Quantity	24PCS
LED Driver Current	700mA
Input Voltage	100~277VAC
Power	60W±10%
Luminous Flux	4800-6000LM
Luminous Efficiency	80-100lm/W
Beam Angel	145°X75°
Power Factor	≥0.95
IP	IP66
Power Efficiency	90%
CCT	Warm White: 3000-3500K Pure White: 4000-4500K Cool White: 5000-5700K
CRI	Ra >70
Frequency Range	47~63Hz
THD	<15%
Storage Temperature	-40℃~+80℃
Working Temperature	-40℃~+50℃ 10%~90%RH
Body Material	Aluminum Alloy

Net Weight	6.6Kg
Gross Weight	8.2Kg
Product Size	775x288x161
Package Size	877x355x238
Average Effective Area	Average Illumination
6M Height	26mX10m / 40Lux
8M Height	45mX12m / 22Lux
10M Height	60mX15m / 14Lux
12M Height	75mX20m / 10Lux
Product Dimension	
Spectrum Chart	 <p>光强单位: cd</p> <ul style="list-style-type: none"> — C0 /180 — C30 /210 — C60 /240 — C90 /270